



### ELECTRICAL CHARACTERISTICS

Driver	Tridonic/Osram
Power supply	200-240V~ 50/60Hz
Power factor (cosφ)	≥0.95
Control options	DALI
Protection class	I

### LUMINOUS CHARACTERISTICS

Light source	Samsung LEDs
Luminaire efficacy	160lm/W
Beam angle	30D (option 90D)
Colour temperature	4000K
CRI	>80


### GENERAL CHARACTERISTICS

Type of housing	Aluminium
Type of diffuser	PC lenses
Protection degree IP	IP42
Impact resistance degree IK	IK06
Operating temperature	-20°C ÷ +40°C
Lifetime (L90B10)	>80 000h
Installation	Suspended, surface-mounted
Mounting height	4-16m
Application	Warehouses, logistics centres, commercial facilities
Certificates	CE, RoHS


Power	Luminous flux (measured on the luminaire)	Rated current	Inrush current	Inrush time <sup>(1)</sup>	Weight	Dimensions
75W	12 000lm	0.37A	34A	0.20ms	3.0kg	L1425xW70xH85mm

(1) measured up to 50% of the peak value of the starting current

### PHOTOMETRY




30D



90D

### TECHNICAL DRAWING

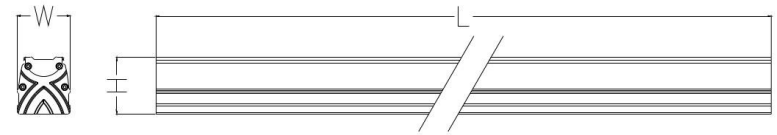

### ACCESSORIES

- 1. Mounting cables** (standard accessories)  
For hanging the luminaire.