

LEDOLUX

P O L A N D

Intelligent LED luminaire

HD LINE+5 YEARS
WARRANTY**ELECTRICAL CHARACTERISTICS**

Driver	Tridonic/Osram
Power supply	200-240V~ 50/60Hz
Power factor (cosφ)	≥0.95
Control options	DALI
Protection class	I

LUMINOUS CHARACTERISTICS


Light source	Samsung LEDs
Luminaire efficacy	160lm/W
Beam angle	30D (option 90D)
Colour temperature	4000K
CRI	>80

GENERAL CHARACTERISTICS


Type of housing	Aluminium
Type of diffuser	PC lenses
Protection degree IP	IP42
Impact resistance degree IK	IK06
Operating temperature	-20°C ÷ +40°C
Lifetime (L90B10)	>80 000h
Installation	Suspended, surface-mounted
Mounting height	4-16m
Application	Warehouses, logistics centres, commercial facilities
Certificates	CE, RoHS, PZH

Power	Luminous flux (measured on the luminaire)	Rated current	Inrush current	Inrush time ⁽¹⁾	Weight	Dimensions
75W	12 000lm	0.37A	34A	0.20ms	3.0kg	L1425xW70xH85mm

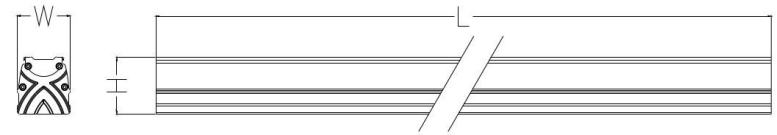
(1) measured up to 50% of the peak value of the starting current

PHOTOMETRY

30D



90D

TECHNICAL DRAWING**ACCESSORIES**

- 1. Mounting cables** (standard accessories)
For hanging the luminaire.

HD LINE+ DATASHEET - We reserve the right to make design changes to luminaires. The current parameters of the product and the General Warranty Conditions are available on the website www.ledolux.pl.

The parameters in the data sheet are given for Ta=25°C, lumen output tolerance ±10%. The rated power of the luminaire (P) is equal to the input power (Pin), power tolerance ± 5%. For the extended warranty period, a half-period warranty inspection is required, standard warranty periods and other conditions are described in the GWC. Creation date: 2022-07-01.

Ledolux Poland Sp. z o.o. NIP:8133074510 Regon:690687005 KRS:0000444766 Share capital: 5.298.000,00zł, CONTACT: e-mail: info@ledolux.pl, tel. +48 696 966 622